


BLIND FLANGE

ASTM A182 • ASME B16.5

FFB

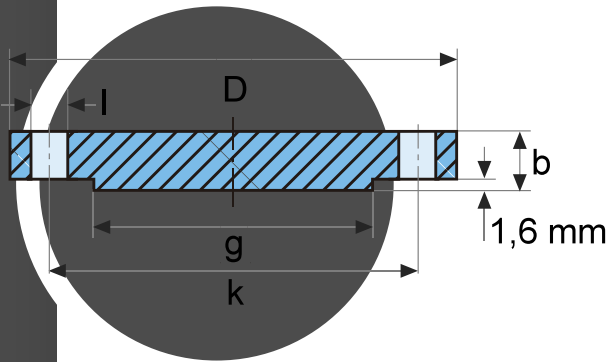

Material Spec.

ASTM A182 • A182M-17

ASME SA182 • SA182M-15

RAISED FACE, SMOOTH FINISH (125–250 RMS/3.2–6.3 μm) 150 lbs

Order example:

- = FFB-304L-6-150
- = FFB-316L-3-150

Pipe Nom. Size	O.D. mm	Flange		Raised Face	Drilling Template			Weight kg/pce	Stock			
		D mm	b mm	g mm	l mm	k mm	No. of Holes		304L	316L	SAF 2205 UNS S31803	SAF 2507 UNS S32750
1/2"	21.3	88.9	11.2	35.1	15.7	60.5	4	0.420	●	●	●	●
3/4"	26.7	98.6	12.7	42.9	15.7	69.9	4	0.610	●	●	●	●
1"	33.4	108.0	14.2	50.8	15.7	79.2	4	0.860	●	●	●	●
1 1/4"	42.2	117.5	15.9	63.5	15.7	88.9	4	1.300	●	●	●	●
1 1/2"	48.3	127.0	17.5	73.2	15.7	98.6	4	1.530	●	●	●	●
2"	60.3	152.4	19.1	91.9	19.1	120.7	4	2.420	●	●	●	●
2 1/2"	73.0	177.8	22.2	104.8	19.1	139.7	4	4.100	●	●	●	●
3"	88.9	190.5	23.9	127.0	19.1	152.4	4	4.930	●	●	●	●
4"	114.3	228.6	23.9	157.2	19.1	190.5	8	7.000	●	●	●	●
5"	141.3	254.0	23.9	185.7	22.4	215.9	8	9.000	●	●	●	●
6"	168.3	279.4	25.4	215.9	22.4	241.3	8	11.300	●	●	●	●
8"	219.1	342.9	28.4	269.7	22.4	298.5	8	19.600	●	●	●	●
10"	273.0	406.4	30.4	323.9	25.4	362.0	12	28.800	●	●	●	●
12"	323.8	482.6	31.8	381.0	25.4	431.8	12	43.200	●	●	●	●
14"	355.6	533.4	34.9	412.7	28.4	476.2	12	59.000	●	●	●	●
16"	406.4	596.9	36.5	469.9	28.4	539.8	16	79.000	●	●	●	●
18"	457.2	635.0	39.6	533.4	31.8	577.9	16	93.700	●	●	●	●
20"	508.0	698.5	42.9	584.2	31.8	635.0	20	122.000	●	●	●	●
24"	609.6	812.8	47.8	692.2	35.1	749.3	20	185.000	●	●	●	●